

Expandet Gas-Powered Insulation Nailer

Expandet Gas-Powered Insulation Nailer – for fast and reliable fixing of insulation on concrete. Supplied in rugged carrying case, with 2 batteries and 2hour charger. Insulation thickness from 40 mm to 140 mm. Use in some brick types are possible provided that on-site test are performed successfully.




BRICK & CONCRETE


ADVANTAGES

- Time saving and reliable fixing of various insulation materials.
- Very fast operation.
- No drilling, centering and hammering.
- Fixing is performed in single step.
- Low maintenance and high performance gas powered pinner.


INSTALLATION:

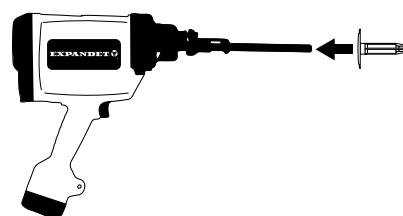

1] Load Expandet Insulation washer on pinner.

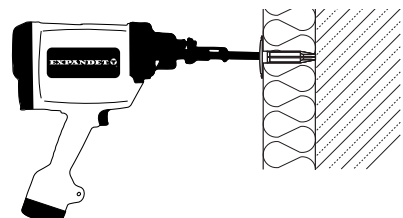

2] Push the pinner all the way into the insulation. Support the back of the pinner with the palm of your free hand.



3] Pull the trigger to fasten.

Recommended loads	Insulation thickness t_i (mm)									
	40	45	50	60	70	80	90	100	120	140
	Pullover (N)									
Ultimate tension load, N_{um}	0,99	0,99	0,99	0,99	0,99	0,99	0,99	0,99	0,99	0,99
Recommended tension load, N_{rec}	0,32	0,32	0,32	0,32	0,32	0,32	0,32	0,32	0,32	0,32

* In Concrete C20/25

Application requirements:

Thickness of base material:

Concrete: $h_{min} = 80$

Steel: $t_{II} > 4$ mm

Thickness of fastened material:


Insulation thickness: $t_i = 25-140$ mm

Spacing and edge distances

For setting instructions please inquire at the insulation material supplier.

NOTE]

Visual check immediately after fastening.

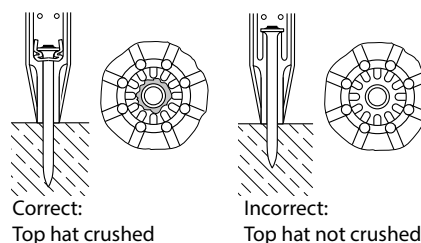

Expandet Gas-Powered Insulation Nailer



EXPANDET GAS-POWERED INSULATION NAILER

TYPE DIMENSION
EPI140

EXPANDET ARTICLE NO.	PCS. PER BOX		EAN 13 PER BOX
50000002	1		

Expandet Fuel Cell

Expandet 12 Bar Fuel Cell for Gas-powered Concrete Nailers. 154 mm Fuel Cell (1300 + shots per cell) is compatible with ITW Spit and Powers Track It®.



EXPANDET FUEL CELL

TYPE DIMENSION
Fuel Cell 154 mm (68 ml)

EXPANDET ARTICLE NO.	PCS. PER BOX		EAN 13 PER BOX
GAS002EX	12		8715274030425

Expandet Insulation Washer

Expandet Insulation Washers are produced in: HDPE.



EXPANDET INSULATION WASHER

TYPE DIMENSION
MM
40 mm
45 mm
50 mm
60 mm
70 mm
80 mm
90 mm
100 mm
120 mm
140 mm

EXPANDET ARTICLE NO.	PCS. PER. BOX		EAN 13 PER BOX
50000003	1.000		
50000004	1.000		
50000005	1.000		
50000006	500		
50000007	500		
50000008	500		
50000009	500		
50000010	250		
50000011	250		
50000012	250		