


Expandet Iso-Screw

Expandet Iso-Screw is the ideal solution for light fixtures in exterior facade insulation with plastering. Possibility for use of standard woodscrew. No thermal bridge.

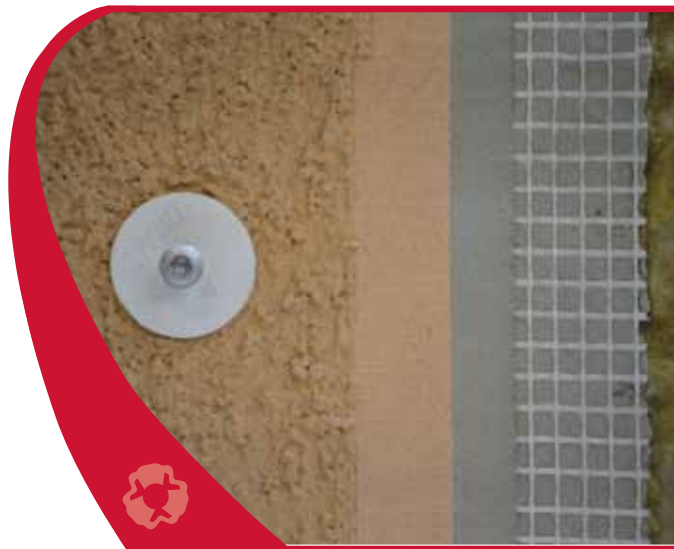

ADVANTAGES

- No thermal bridge.
- Possibility for use of standard woodscrew.

Type	Load capacities
DIMENSION	F_{Rd}
	Combined Design resistance (kN)
Iso-Screw 50	0,03
Iso-Screw 80	0,05

The above mentioned load capacities are provided for guidance only.

INSTALLATION:

- 1] push the tip of Iso-Screw through the plaster layer (there may be predrilled with 8 mm through plaster layer)
- 2] Install the Iso-Screw with TX 40 bit
- 3] Screw in the Iso-Screw until it is leveled with the surface
- 4] Install the object with a woodscrew 4,0 to 4,5 mm

Expandet Iso-Screw



EXPANDET ISO-SCREW (Technical Sheet No. 321)

TYPE DIMENSION MM	UTER DIAMETER OF ANCHOR MM	LENGTH OF ANCHOR MM	SCREW DIAMETER MM	EXPANDET ARTICLE NO.	PCS. PER BOX	EAN 13 PER BOX
Iso-Screw 50	27	50	4,0 - 4,5	ISO50	25	5708620103075
Iso-Screw 80	27	80	4,0 - 4,5	ISO80	20	5708620103082

BRICK & CONCRETE



Expandet Iso-Screw is the ideal solution for fixing downspouts, mailboxes, video cameras, lamps etc.

